

LG REFRIGERATION

LRFXC2606_

26 cu. ft. Counter Depth MAX Refrigerator

- Industry's Largest 26 cu. ft. Counter Depth Capacity
- Dual Ice maker – Cubed and Crush
- Cool Guard
- Door Cooling+
- Flat Door Design with Handle
- Smart Inverter

AVAILABLE COLORS

PRINTPROOF™ STAINLESS STEEL

PRINTPROOF™ BLACK STAINLESS STEEL



ThinQ Care


Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

CAPACITY		REFRIGERATOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu. ft.)	16.9 cu. ft.	No. of Shelves	4 split (4 Fixed)	Product (W x H x D)	35 3/4" x 70 1/4" x 31 5/8"
Freezer (cu. ft.)	8.6 cu. ft.	Shelf Construction	Spill Protector/Tempered Glass	Width	35 3/4"
Total Capacity (cu. ft.)	25.5 cu. ft.	Shelf Trim	White Décor	Height (to Top of Hinge)	70 1/4"
ENERGY		No. of Crisper Bins	2	Depth (with Handles)	31 5/8"
ENERGY STAR® Qualified	Yes	Pantry (Glide N Serve)	Yes (Normal)	Width (Door Open 90° without Handle)	40"
Energy Consumption (kWh/Year)	699	Cool Guard	Yes	Width (Door Open 90° with Handle)	44 7/8"
WATER & ICE SYSTEM		Fresh Air Filter	Yes	Width (Door Fully Open without Handle)	56 3/4"
Ice & Water Dispenser	Yes	Light	Yes	Height (to Top of Case)	68 7/8"
In-door Ice maker	Yes (1)	REFRIGERATOR DOOR		Depth without Door	24 3/4"
In-door Ice maker Ice Type	Cubed / Crushed	No. of Bins	4 (Left Door), 4 (Right Door)	Depth without Handles	29 1/8"
In-door Ice maker Daily Production	3.0 / 3.3 (IcePlus) lbs.	Door Shape	Flat	Depth (to Hinge Cover)	18 1/4"
In-door Ice maker Storage Capacity	3.0 lbs.	Handle Type	Bar	Depth (Total with Door Open)	43 5/8"
		FREEZER		Depth (Draw Open Fully without Handle)	48 7/8"
No. Freezer Ice maker	Yes (1)	Door Type	Pull Drawer	Installation Clearance	Sides 1/8", Top 1", Back 2"
Freezer Ice maker Ice Type	Cubed	Handle Type	Smart Pull™ Handle	Carton Dimensions (WxHxD)	38" x 72" x 31"
Freezer Ice maker Daily Production	2.5 / 2.7 (IcePlus) lbs.	Drawers / Shelves	2-Tier Organization	Weight (Unit/Carton)	291 lbs. / 313 lbs.
Freezer Ice maker Storage Capacity	4.0 lbs.	Freezer Light	Upper LED Lighting	LIMITED WARRANTY	
Ice Plus	Yes		Lower No	Parts & Labor	1 Year
Filteration System	1 stage	SMART TECHNOLOGY		Sealed System (Parts & Labor)	5 Years
Filter	LT1000P	Smart Diagnosis	Yes	Compressor (Parts & Labor)	5 Years
COOLING		Wi-Fi	Yes	Linear Compressor (Parts & Labor)	6 - 10 Years
Compressor Type	Smart Inverter	ThinQ®	Yes	UPC CODES	
Evaporator	Yes (1)	ThinQ® Care	Yes	LRFXC2606S (PrintProof™ Stainless Steel)	195174057339
		MATERIALS AND FINISHES		LRFXC2606D (PrintProof™ Black Stainless Steel)	TBD
Multi Air Flow Cooling	Yes	Hidden Hinges	Yes		
Temperature Sensors	2	Surface	Smooth		
Refrigerant	Low GWP, Zero ODP and More Energy Efficient Refrigerant (R600a / 57g / 2.01oz)	Handles	Matching Commercial Handles		
		All Available Colors	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel		
			Low GWP and Zero ODP Blowing Agent		
CONVENIENCE		Insulation			
Display Type	Smooth Touch Control / White LED				
Temperature Controls	Electronic/Digital				
Door Alarm	Yes				
Child Lock	Yes				
Auto Closing Door Hinge	Yes				
Decibel™ Quiet Operation	Yes				
Sabbath Mode	Yes				
ADA Compliant	Yes				

Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
 - If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/Assembling the Doors and Drawers in this manual.
 - The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
 - Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.
- **3-Door**

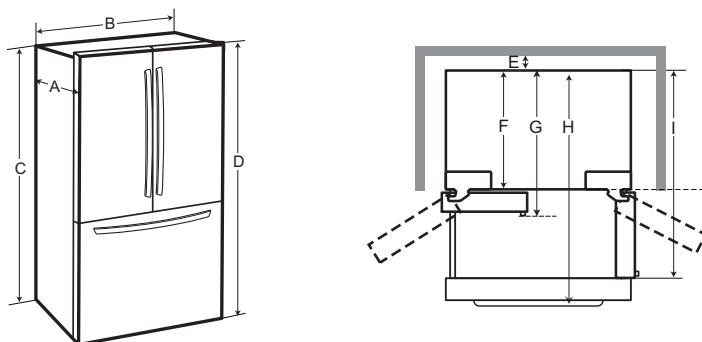

-	Dimension/Clearance		LRFOC2606* LRFGC2706* LRFLC2706* LRFXC2606* LLFGC2706* LCFC26XS*
A	Depth without Handle		29 1/8" (739 mm)
B	Width		35 3/4" (908 mm)
C	Height to Top of Case		68 7/8" (1750 mm)
D	Height to Top of Hinge		70 1/4" (1785 mm)
E	Back Clearance		2" (50 mm)
F	Depth without Door		24 3/4" (628 mm)
G	Depth with Handle		31 5/8" (802 mm)
H	Depth (Total with Freezer Drawer Open)		48 7/8" (1239 mm)
I	Depth (Total with Door Open 90°)		43 5/8" (1106 mm)