

LG REFRIGERATION

LRYKC2606_

26 cu. ft. Counter Depth MAX Refrigerator

- Industry's Largest 26 cu. ft. Counter Depth Capacity
- Mirror InstaView® with Door in Door
- Pocket Handle Design with Welcome Light
- Industry's First 3 Built-in Ice maker
- Market First 4 Types of Ice
- Cool Guard with Premium Backlit Lighting

AVAILABLE COLORS



PRINTPROOF™ STAINLESS STEEL



PRINTPROOF™ BLACK STAINLESS STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly


ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

CAPACITY		REFRIGERATOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu. ft.)	16.9 cu. ft.	No. of Shelves	4 split (3 Fixed + 1 Retractable)	Product (W x H x D)	35 3/4" x 70 1/4" x 29 1/8"
Freezer (cu. ft.)	8.6 cu. ft.	Shelf Construction	Spill Protector/Tempered Glass	Width	35 3/4"
Total Capacity (cu. ft.)	25.5 cu. ft.	Shelf Trim	Metallic Décor	Height (to Top of Hinge)	70 1/4"
ENERGY		No. of Crisper Bins	2	Depth (with Handles)	29 1/8"
ENERGY STAR® Qualified	Yes	Pantry (Glide N Serve)	Yes (Temp. Control)	Width (Door Open 90° without Handle)	40"
Energy Consumption (kWh/Year)	699	Cool Guard	Yes	Width (Door Open 90° with Handle)	44 7/8"
WATER & ICE SYSTEM		Fresh Air Filter	Yes	Width (Door Fully Open without Handle)	56 3/4"
Ice & Water Dispenser	Yes	Light	Yes	Height (to Top of Case)	68 7/8"
Water Dispenser UVnano	Yes	Light (Back lit lighting)	Yes	Depth without Door	24 3/4"
In-door Ice maker	Yes (1)	REFRIGERATOR DOOR		Depth without Handles	29 1/8"
In-door Ice maker Ice Type	Cubed / Crushed	InstaView®	Yes	Depth (to Hinge Cover)	18 1/4"
In-door Ice maker Daily Production	3.0 / 3.3 (IcePlus) lbs.	InstaView® Dimension (WxH)	11 3/4" x 30 3/4"	Depth (Total with Door Open)	43 5/8"
In-door Ice maker Storage Capacity	3.0 lbs.	Door-in-Door®	Yes	Depth (Draw Open Fully without Handle)	48 7/8"
No. Freezer Ice maker	Yes (2)	No. of Bins	4 (Left Door), 4 (Right Door)	Installation Clearance	Sides 1/8", Top 1", Back 2"
Freezer Ice maker Ice Type	Craft & Mini Cubed	Door Shape	Flat	Carton Dimensions (WxHxD)	38" x 72" x 31"
Freezer Ice maker Daily Production	3 or 6 ea & 1.5 / 1.7 (IcePlus) lbs.	Handle Type	Pocket	Weight (Unit/Carton)	291 lbs. / 313 lbs.
Freezer Ice maker Storage Capacity	27 ea / 4.0 lbs.	Handle Light	Yes	LIMITED WARRANTY	
Ice Plus	Yes	FREEZER		Parts & Labor	1 Year
Filtration System	1 stage	Door Type	Pull Drawer	Sealed System (Parts & Labor)	5 Years
Filter	LT1000P	Handle Type	Smart Pull™ Handle	Compressor (Parts & Labor)	5 Years
Dispenser Light Decoration	Yes	Drawers / Shelves	3-Tier Organization	Linear Compressor (Parts & Labor)	6 - 10 Years
COOLING		Freezer Light	Upper LED Lighting Lower No	UPC CODES	
Compressor Type	Smart Inverter	SMART TECHNOLOGY		LRYKC2606S (PrintProof™ Stainless Steel)	195174034828
Evaporator	Yes (1)	Smart Diagnosis	Yes	LRYKC2606D (PrintProof™ Black Stainless Steel)	195174037669
Multi Air Flow Cooling	Yes	Wi-Fi	Yes		
Temperature Sensors	3	ThinQ®	Yes		
Refrigerant	Low GWP, Zero ODP and More Energy Efficient Refrigerant (R600a / 57g / 2.01oz)	ThinQ® Care	Yes		
		MATERIALS AND FINISHES			
CONVENIENCE		Hidden Hinges	Yes		
Display Type	Smooth Touch Control / White LED	All Available Colors	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel		
Temperature Controls	Electronic/Digital	Insulation	Low GWP and Zero ODP Blowing Agent		
Door Alarm	Yes				
Child Lock	Yes				
Auto Closing Door Hinge	Yes				
Sabbath Mode	Yes				
ADA Compliant	Yes				

Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

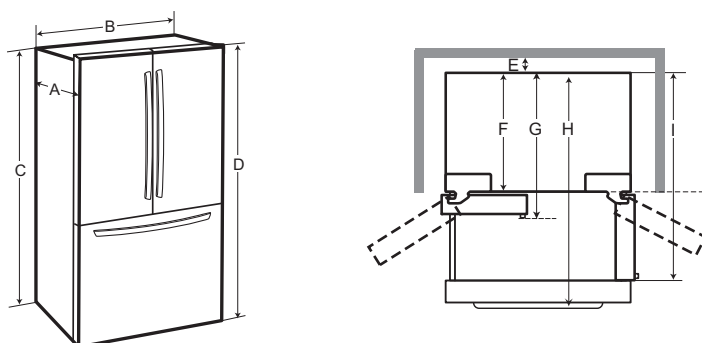

Models without handles

-	Dimension/Clearance	LRYKC2606* LRYXC2606*
A	Depth without Handle	29 1/8" (739 mm)
B	Width	35 3/4" (908 mm)

-	Dimension/Clearance	LRYKC2606* LRYXC2606*
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (628 mm)
G	Depth with Handle	N/A
H	Depth (Total with Freezer Drawer Open)	48 7/8" (1239 mm)
I	Depth (Total with Door Open 90°)	43 5/8" (1106 mm)