



Kitchenaid® 20.8 Cu. Ft. Counter-Depth Side-by-Side Refrigerator with Exterior Ice and Water Dispenser in PrintShield™ Finish

KRSC536RPS

Available Finishes/Colours

 KRSC536RPS
FingerPrint Resistant
Stainless Steel

 KRSC536RJP
Juniper

 KRSC536RBE
Black Ore

Make room for every grocery run and farmers market haul with this large capacity counter-depth side-by-side refrigerator from KitchenAid brand. Counter-depth design fits with surrounding cabinetry to create a built-in appearance. Panoramic LED Lighting illuminates every angle to keep ingredients in sight and easy to find. And an Exterior Ice and Water Dispenser with Measured Fill allows you to select and dispense the exact amount you need in ounces, cups or liters.

Top Features

Spacious Counter-Depth Capacity at 20.8 cu. ft.

Panoramic LED Lighting

Customizable Spaces for Items Big and Small

Manuals & Literature:

 [Dimension Guide](#)  [Energy Guide](#)

 [Owners Manual](#)  [Warranty Information](#)


Dimensions		Freezer Compartment	
Depth	28.38	Freezer Drawer Basket	1 Full Width Lower Plastic
Height	69.25	Door Type	Swing
Width	35.5	Door Bins	3 Fixed Full-Width
Exterior		Freezer Number Of Shelves	1 Fixed Full-Width Glass; 3 Adjustable Full-Width Glass
Number Of Doors	2	Shelves	1 Fixed Full-Width Glass; 3 Adjustable Full-Width Glass
Reversible Door	No	Light	Yes
Hidden Hinge	Yes	Filters	
Door Style	Contour	Water Filter Part Number	EDRARXD1
Door Finish	PrintShield Finish	Water Filter Location	Interior
Cabinet Finish	Smooth	Produce Preserver	No
Cabinet Color	Grey	Fresh Flow Air Filter Included	Yes
Base Grille Color	Grey		
Handle Type	Reach-Through Handle		
Handle Material	Metal		
Handle Color	Stainless Steel		

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid® Side by Side Refrigerator

(KRSC536R*, KRSC336R*)

PRODUCT DIMENSIONS

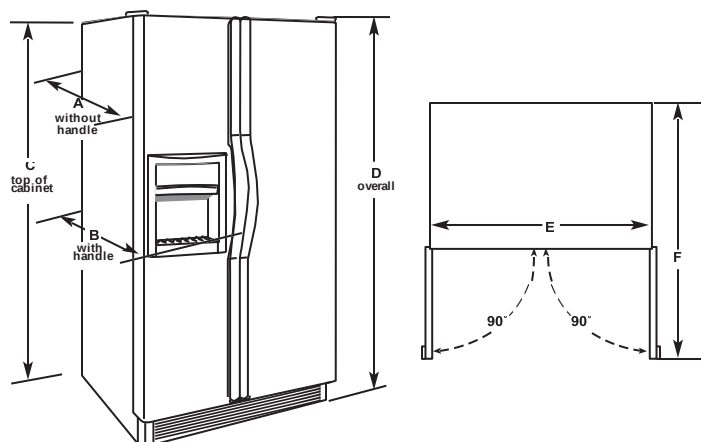

Model Number	KRSC536R*, KRSC336R*
Model Size	28.7 cu ft (812.6 L)
Depth - Without Handles "A"	27½" (69.8 cm)
Depth - With Handles "B"	29¼" (74.3 cm)
Height - Top of Cabinet "C"	68⅞" (174.9 cm)
Height - Overall "D"	69" (175.3 cm)
Width - Cabinet "E"	36" (91.4 cm)
Depth - Doors Open 90° "F"	45⅞" (116.4 cm)
Handle and door style will vary with model. Dimensions "C" and "D" included rollers extended ¾" (1.9 cm).	

ELECTRICAL REQUIREMENTS

⚠ WARNING

Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Before you move your refrigerator into its final location, it is important to make sure you have the proper electrical connection.

Recommended Grounding Method

A 115 V, 60 Hz AC only, 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn cooling off or turn the control (thermostat, refrigerator, or freezer control depending on the model) to Off. Then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source. Turn cooling on or reset the control (thermostat, refrigerator, or freezer control depending on the model) to the desired setting. See "Control Descriptions" in the Quick Start Guide.

Water Pressure

A cold water supply with water pressure between 30 psi and 120 psi (207 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 psi and 120 psi (207 kPa and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

If the water pressure to the reverse osmosis system is less than 40 psi to 60 psi (276 kPa to 414 kPa):

- Check to see whether the sediment filter in the reverse osmosis system is blocked. Replace the filter if necessary.
- Allow the storage tank on the reverse osmosis system to refill after heavy usage.
- If your refrigerator has a water filter, it may further reduce the water pressure when used in conjunction with a reverse osmosis system. Remove the water filter. See "Water Filtration System."

If you have questions about your water pressure, call a licensed, qualified plumber.

LOCATION REQUIREMENTS

WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from appliance.

Use nonflammable cleaner.

Failure to do so can result in death, explosion, or fire.

IMPORTANT:

- This refrigerator is designed for indoor and household use only.
- Observe all governing codes and ordinances.
- Keep cardboard shipping piece or plywood under refrigerator until it is installed in the operating position.
- Comply with installation specifications and dimensions.
- Remove any moldings or decorative panels from kitchen cabinets that would not allow access to the refrigerator for service.
- Contact a qualified electrical installer.

NOTES:

- The refrigerator can be installed into a recessed opening, at the end of cabinets or as a freestanding refrigerator.
- If you are installing the refrigerator to fit flush with the front of the base cabinets, all shoe moulding and baseboards must be removed from the rear of the refrigerator opening. Allow for 1" (2.54 cm) of space behind the refrigerator.
- Location should permit doors to open fully. See "Product Dimensions."
- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Floor must support refrigerator weight (more than 600 lbs [272 kg]) and contents.